


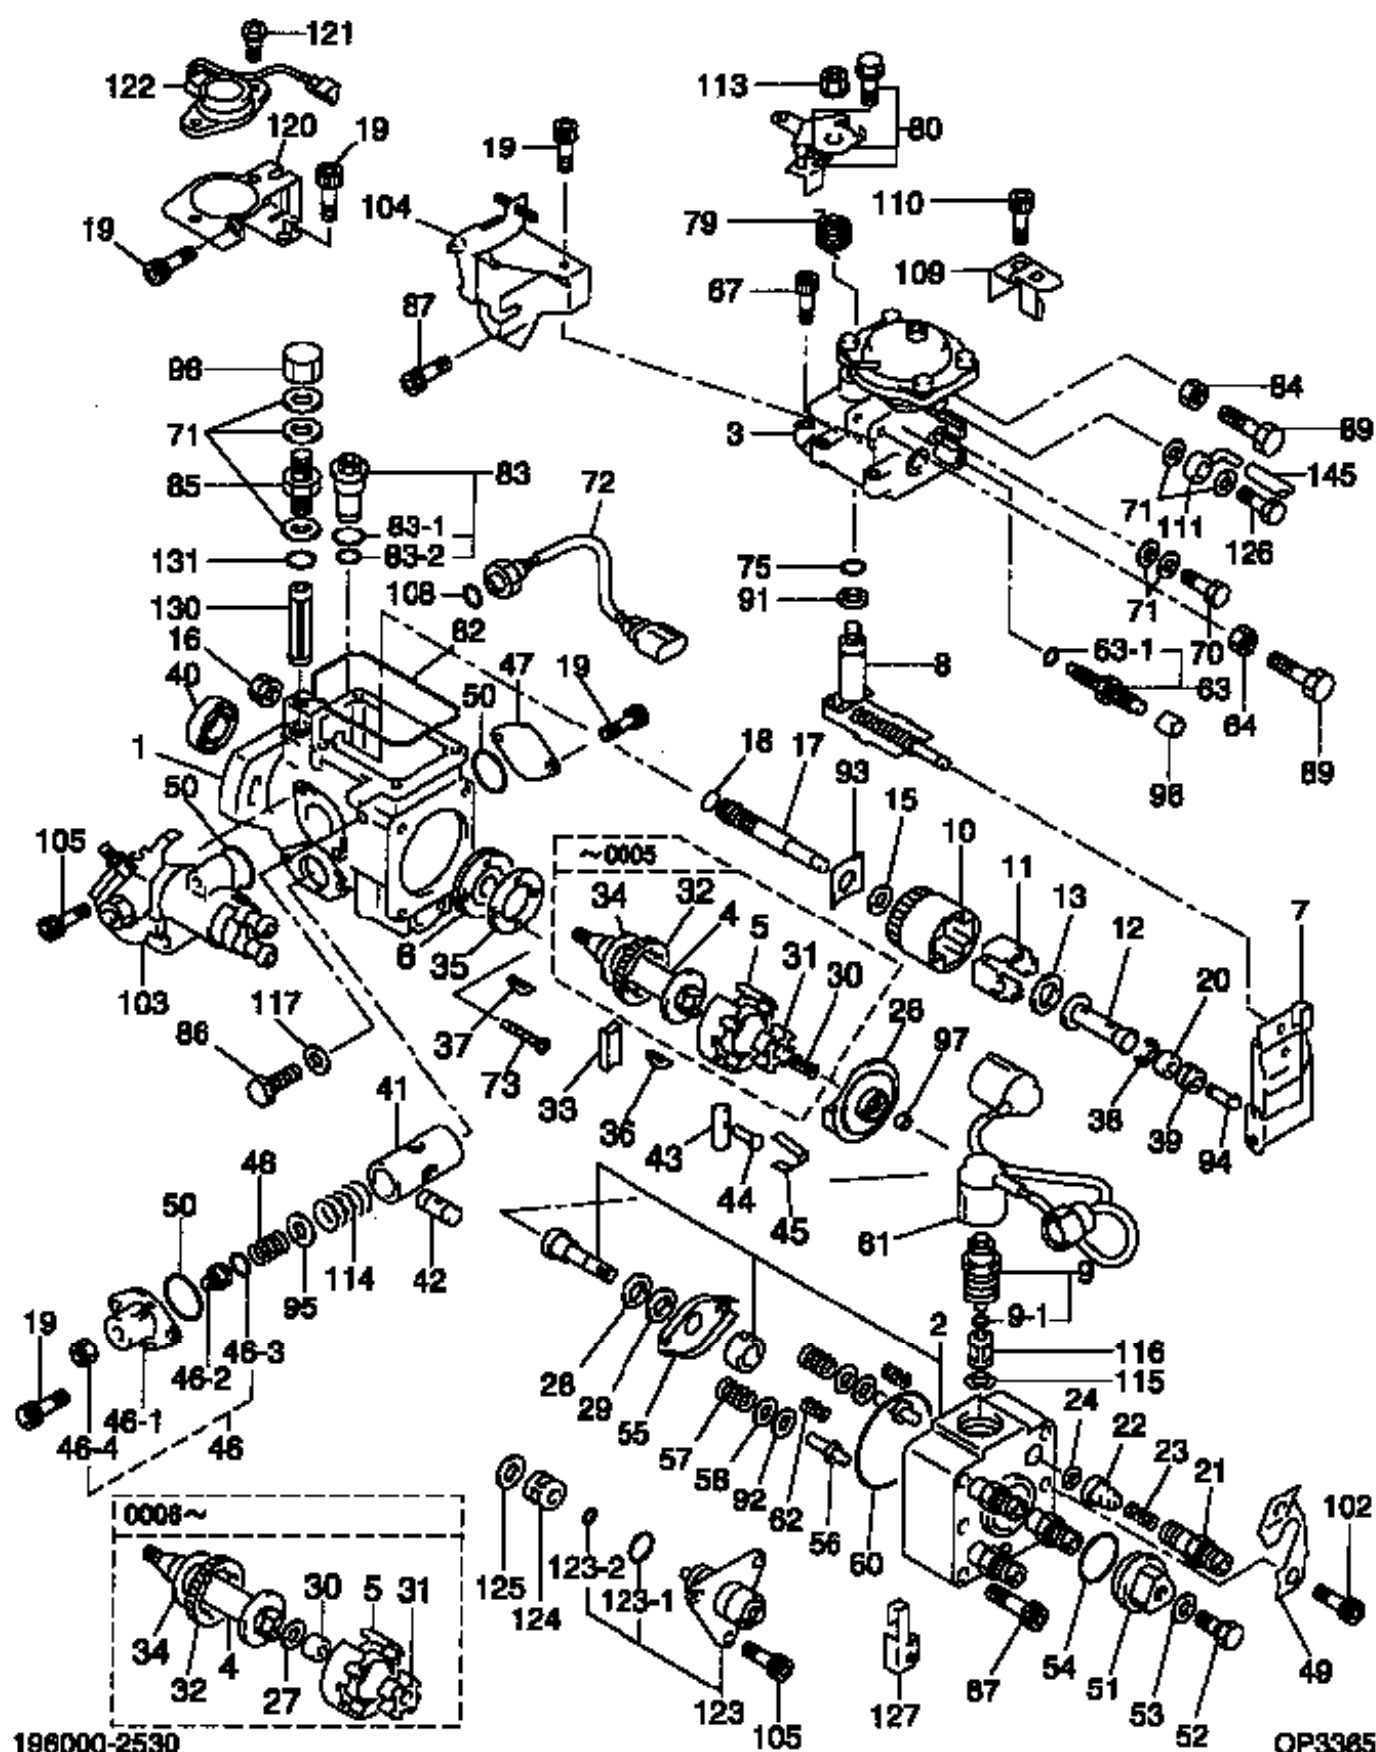

Parts List

Page 1

Compo. P/N: 196000-2531

Assy P/N: 196000-2531

S	M	Illust.No.	Part Name	DENSO P/N	Manu. P/N	QTY	I/C	Start	End	Remarks
		0	PUMP ASSY, INJECTI	196000-2531	22100-5B850	01				
		1	HOUSING SUB-ASSY,	096110-1100	22101-5B680	01				
		2	HEAD SUB-ASSY, DIS	096400-1780	22140-5B850	01				
		3	COMPENSATOR SUB-AS	096490-1611	22540-5B850	01				
S		4	SHAFT, DRIVE	096121-0060	22170-54030	01			0005	
S		4	SHAFT, DRIVE	096121-0290	22170-5B850	01	D	0006		
S		5	RING SUB-ASSY, ROL	096180-0050	22108-54180	01				
		6	PUMP SUB-ASSY, FUE	096140-0030	22505-54010	01				
		7	GOVERNOR ASSY, TOR	096270-1590	22350-5B850	01				STD
		8	SHAFT SUB-ASSY, SP	096460-1870	22365-5B850	01				
		9	SOLENOID ASSY, FUE	096030-0520	22390-6A511	01				FCV,12V
		9-1	O-RING	096049-0350	22193-5D191	01				ID14.4
		10	HOLDER SUB-ASSY, F	096260-0050	22741-54020	01				
S		11	FLYWEIGHT, DISTRIB	096263-0060	22745-5B640	04				
		12	SLEEVE, GOVERNOR	096252-1900	22316-6A721	01				
S		13	WASHER, FLYWEIGHT	096265-0030	22753-54020	01				ROUND TYPE
S		15	WASHER, FLYWEIGHT	096265-0020	22753-54010	01				T1.30
		16	NUT, GOVERNOR SHAF	096254-0050	22722-54470	01				M10,L SCREW
		17	SHAFT, GOVERNOR MA	096251-0020	22384-54010	01				
		18	O-RING	949140-2930	90099-14049	01				ID 8
		19	BOLT, SOCKET	096449-0110	22395-56351	09			0005	M6,L16
		19	BOLT, SOCKET	096449-0110	22395-56351	10		0006		M6,L16
		20	RING, GOVERNOR SLE	096255-0020	22147-54290	01				
		21	VALVE SUB-ASSY, SN	096430-0200	22190-5B640	04				
		22	VALVE SUB-ASSY, DI	096420-0870	22104-5B850	04				
S		23	SPRING, DELIVERY V	096427-0010	22148-54010	04				
		24	GASKET, DELIVERY V	096426-0070	22149-56351	04				
S		26	CAMPLATE SUB-ASSY,	096230-0600	22130-5B850	01				
		27	WASHER	096064-0220	22689-5B170	01		0006		T1.8
S		28	PLATE, PLUNGER, LW	096245-0020	22163-54010	01				
S		29	PLATE, PLUNGER, UP	096244-0040	22162-54010	01				
		30	SPRING, COUPLING	096224-0040	22659-64150	01			0005	
		30	SPACER, COUPLING	096225-0010	90099-70002	01	D	0006		
		31	COUPLING	096222-0020	22632-54010	01			0005	
		31	COUPLING	096222-0110	22632-5B170	01	D	0006		
		32	GEAR, GOVERNOR DRI	096124-0030	22341-54010	01				
		33	JOINT, RUBBER	096126-0020	22169-54180	02				
		34	WASHER, DRIVE SHAF	096125-0010	22161-54010	01				
S		35	COVER, FEED PUMP	096147-0040	22511-54020	01				
		36	KEY, WOODRUFF	949130-0260	90099-13017	01				
		37	KEY, WOODRUFF	949130-0300	90099-13018	01				T4.023
		38	E-RING	90577-02000	90096-90024	01				D2
S		39	BEARING, BALL	949100-2860	90099-10148	01				OD8
S		40	SEAL, OIL	096039-0040	22544-64740	01				

Parts List

Page 2

Compo. P/N: 196000-2531

Assy P/N: 196000-2531

S	M	Illust.No.	Part Name	DENSO P/N	Manu. P/N	QTY	I/C	Start	End	Remarks
		41	PISTON ASSY, TIMER	096190-1480	22582-5B850	01				
		42	SUB-PISTON, TIMER	096213-0020	22657-54010	01				
		43	PIN, TIMER SLIDE	096205-0020	22655-54010	01				
		44	STOPPER, TIMER SLI	096216-0120	22658-17840	01				L16.4
		45	CLIP, TIMER	096211-0080	22656-17840	01				L/ DITCH
		46	COVER SUB-ASSY, TI	096210-0870	22790-17020	01				TIMER COVER
		46-1	COVER, TIMER	096218-0870	22612-17020	01				
		46-2	STOPPER, TIMER SLI	096216-0110	22658-17020	01				
		46-3	O-RING	096049-0290	22193-17020	01				
		46-4	NUT, HEXAGON	949050-5010	90099-05225	01				
		47	COVER, TIMER	096218-0270	22612-56350	01				
		48	SPRING, TIMER, OUT	096208-1320	22615-17020	1C				K0.16
		48	SPRING, TIMER, OUT	096208-1330	22615-18021	1C				K0.17
		48	SPRING, TIMER, OUT	096208-1340	22615-17021	1C				K0.18
		48	SPRING, TIMER, OUT	096208-1410	22615-18020	1C				K0.15
		48	SPRING, TIMER, OUT	096208-1810	22615-5B374	1C				K0.14,VIOLET
		49	CLIP, CONNECTOR SU	096029-0930	22172-54263	01				
		50	O-RING	096049-0400	22193-17840	03				ID27.5
S		51	PLUG, DISTRIBUTIVE	096417-0040	22176-54020	01				
		52	BOLT, DISTRIBUTIVE	096418-0020	22128-54010	01				M8,L19.7
		53	GASKET, DELIVERY V	096426-0030	22149-56200	01				ID8.2,T1
		54	O-RING	096049-0510	22193-54772	01				ID30
S		55	SHEET, PLUNGER SPR	096247-0010	22145-54010	01				
		56	GUIDE SUB-ASSY, PL	096237-0010	22192-54010	02				
		57	SPRING, PLUNGER	096236-0040	22144-54190	02				K10
		58	SHEET, PLUNGER SPR	096246-0010	22143-54010	02				
		60	O-RING	949140-2980	90099-14053	01				ID60
		61	WIRE SUB-ASSY	096045-0621	22751-5B320	01				
		62	SPRING, LEVER SUPP	096279-0010	22314-54010	02				K1.03
		63	SMOKE SET SUB-ASSY	096480-0010		01				
		63-1	O-RING	096049-0470	22193-54771	01				ID5
		64	NUT, HEXAGON	90166-06051	90092-10608	01				M6,L5
		67	BOLT, SOCKET	096449-0020	22395-54010	04				M6,L35
		70	SCREW SUB-ASSY, OV	096020-0030	22160-64010	01				W/FILTER
		71	WASHER, AIR BLEEDE	090241-0010	22119-77020	07				T1.6
		72	PICKUP ASSY, TACHO	076300-2140	83180-35020	01				
		73	SCREW, COUNTERSUNK	949002-0420	90099-00723	02				M4,L28
		75	O-RING	096049-0300	22193-54770	01				ID 6.5
		79	SPRING, RETURN	096444-0750	22322-54630	01				
		80	LEVER SUB-ASSY, AD	096435-6670	22701-5B680	1C				ANGLE 14
		80	LEVER SUB-ASSY, AD	096435-6680	22701-5B690	1C				ANGLE 21.5
		82	GASKET, GOVERNOR C	096446-0100	22774-54270	01				
S		83	VALVE SUB-ASSY, RE	096160-0070	22180-55050	01				
		83-1	O-RING	096049-0180	22193-54561	01				ID10

Parts List

Page 3

Compo. P/N: 196000-2531

Assy P/N: 196000-2531

S	M	Illust.No.	Part Name	DENSO P/N	Manu. P/N	QTY	I/C	Start	End	Remarks
		83-2	O-RING	096049-0500		01				ID7.5
		84	NUT, LOCK	096342-0010	22775-77121	01				M6,L5
		85	SCREW, HOLLOW	949180-0770	90099-18022	01				M12,L43.5
		86	BOLT, GOVERNOR LIN	096269-0020	22739-54020	02				M8,L19
		87	BOLT, SOCKET	096449-0070	22395-58200	05				M6,L45
		89	BOLT, HEXAGON, W/	949045-0210	90099-04954	02				M6,L62
		91	WASHER, GOVERNOR T	096273-0140	22378-64010	01				T0.5
		92	SHIM, PLUNGER SPRI	096248-0010	22182-54010	2C				T0.5
		92	SHIM, PLUNGER SPRI	096248-0020	22183-54010	2C				T0.8
		92	SHIM, PLUNGER SPRI	096248-0030	22184-54010	2C				T1.0
		92	SHIM, PLUNGER SPRI	096248-0040	22185-54010	2C				T1.2
		92	SHIM, PLUNGER SPRI	096248-0050	22186-54010	2C				T1.5
		92	SHIM, PLUNGER SPRI	096248-0060	22187-54010	2C				T1.8
		92	SHIM, PLUNGER SPRI	096248-0070	22188-54010	2C				T2.0
		92	SHIM, PLUNGER SPRI	096248-0080	22182-17010	2C				T0.9
		92	SHIM, PLUNGER SPRI	096248-0090	22182-17011	2C				T1.1
		92	SHIM, PLUNGER SPRI	096248-0100	22182-17012	2C				T1.3
		92	SHIM, PLUNGER SPRI	096248-0110	22182-17013	2C				T1.4
		93	WASHER, GOVERNOR G	096266-0100	22713-54010	1C				T1.05
		93	WASHER, GOVERNOR G	096266-0110	22714-54010	1C				T1.25
		93	WASHER, GOVERNOR G	096266-0120	22715-54010	1C				T1.45
		93	WASHER, GOVERNOR G	096266-0130	22716-54010	1C				T1.65
		93	WASHER, GOVERNOR G	096266-0140	22717-54010	1C				T1.85
		93	WASHER, GOVERNOR G	096266-0150		1C				T1.55
		93	WASHER, GOVERNOR G	096266-0160		1C				T1.75
		93	WASHER, GOVERNOR G	096266-0170		1C				T2.05
		93	WASHER, GOVERNOR G	096266-0270		1C				T1.3
		93	WASHER, GOVERNOR G	096266-0280		1C				T1.4
		93	WASHER, GOVERNOR G	096266-0290		1C				T1.5
		93	WASHER, GOVERNOR G	096266-0300		1C				T1.6
		93	WASHER, GOVERNOR G	096266-0310		1C		9807		T1.15
		93	WASHER, GOVERNOR G	096266-0320		1C		9807		T1.2
		93	WASHER, GOVERNOR G	096266-0330		1C		9807		T1.7
		93	WASHER, GOVERNOR G	096266-0340		1C		9807		T1.85
		94	PLUG, GOVERNOR SLE	096256-0400	22787-64641	1C				L3.0
		94	PLUG, GOVERNOR SLE	096256-0410	22787-64642	1C				L3.1
		94	PLUG, GOVERNOR SLE	096256-0420	22787-64643	1C				L3.2
		94	PLUG, GOVERNOR SLE	096256-0430	22787-54026	1C				L3.3
		94	PLUG, GOVERNOR SLE	096256-0440	22787-54027	1C				L3.4
		94	PLUG, GOVERNOR SLE	096256-0450	22787-54028	1C				L3.5
		94	PLUG, GOVERNOR SLE	096256-0460	22787-54029	1C				L3.6
		94	PLUG, GOVERNOR SLE	096256-0470	22787-54030	1C				L3.7
		94	PLUG, GOVERNOR SLE	096256-0480	22787-54031	1C				L3.8
		94	PLUG, GOVERNOR SLE	096256-0490	22787-54032	1C				L3.9


Parts List

Page 4

Compo. P/N: 196000-2531

Assy P/N: 196000-2531

S	M	Illust.No.	Part Name	DENSO P/N	Manu. P/N	QTY	I/C	Start	End	Remarks
		94	PLUG, GOVERNOR SLE	096256-0500	22787-54033	1C				L4.0
		94	PLUG, GOVERNOR SLE	096256-0510	22787-64640	1C				L4.1
		94	PLUG, GOVERNOR SLE	096256-0520	22787-64680	1C				L4.2
		95	WASHER, TIMER SENS	096214-0180	22625-17020	01				OUTER T0.5
		96	COLLAR, SMOKE SET	096448-0111		01				COLLAR TYPE
		97	SHIM, PLUNGER ADJU	096406-0020	22179-54010	1C				T1.9
		97	SHIM, PLUNGER ADJU	096406-0170	22179-54013	1C				T2.2
		97	SHIM, PLUNGER ADJU	096406-0270	22179-54015	1C				T2.4
		97	SHIM, PLUNGER ADJU	096406-0420	22179-54018	1C				T2.7
		97	SHIM, PLUNGER ADJU	096406-0520	22179-54020	1C				T2.9
		98	NUT, CAP	949055-0300	90099-05161	01				M12
		102	BOLT, SOCKET	096449-0140	22395-56350	01				M8,L16
		103	COVER SUB-ASSY, TI	096210-1120	22790-5B460	01				ACSD
		104	IDLE UP SUB-ASSY	096470-0720	22305-5B850	01				
		105	BOLT, SOCKET	096449-0100	22395-56352	05				M6,L10
		108	O-RING	096049-0190	22193-64750	01				ID14.8
		109	BRACKET SUB-ASSY,	096471-0640	22601-5B360	01				
		110	BOLT, SOCKET	096449-0220	22395-5B320	01			0005	
		111	NIPPLE SUB-ASSY, S	092218-0631	22548-5B850	01				
		113	NUT	949056-1680	90179-06009	01				M6,L6.5
		114	SPRING, TIMER, OUT	096208-1370	22615-17030	01				K1.7
		115	WASHER	096064-0110	22689-56350	01				T0.2
S		116	FILTER, SUB-ASSY	096530-0071	22602-56350	01				
		117	GASKET, DELIVERY V	096426-0130	22149-54771	02				
		120	BRACKET, IDLE UP	096438-3480	22178-5B680	01			9806	
		120	BRACKET, IDLE UP	096438-2670	22178-5B840	01	A	9807		
		121	SCREW, W/WASHER	91370-04121	93315-14012	02				M4,L12
		122	SENSOR, ROTARY POS	198500-5031	89452-28080	01				
		123	SOLENOID ASSY, FUE	096030-0560	22390-5B850	01				
		123-1	O-RING	096049-0210		01				ID23.3
		123-2	O-RING	096049-0100	22193-54290	01				ID9.5
S		124	FILTER, SUB-ASSY	096530-0020	22602-5B680	01				
		125	WASHER	096064-0100	22689-5B680	01				
		126	SCREW, OVERFLOW	096021-0271	22569-5B850	01				
		127	CLIP, CONNECTOR SU	096029-1310	22172-5B321	01			9811	
		127	CLIP, CONNECTOR SU	096029-0030	22172-64160	01	B	9812		
S		130	FILTER, SUB-ASSY	096530-0111	22602-5B320	01				
		131	O-RING	096049-0460	22193-5B320	01				ID6.5
		145	HOSE, VACUUM	703110-0019	95411-10019	01				

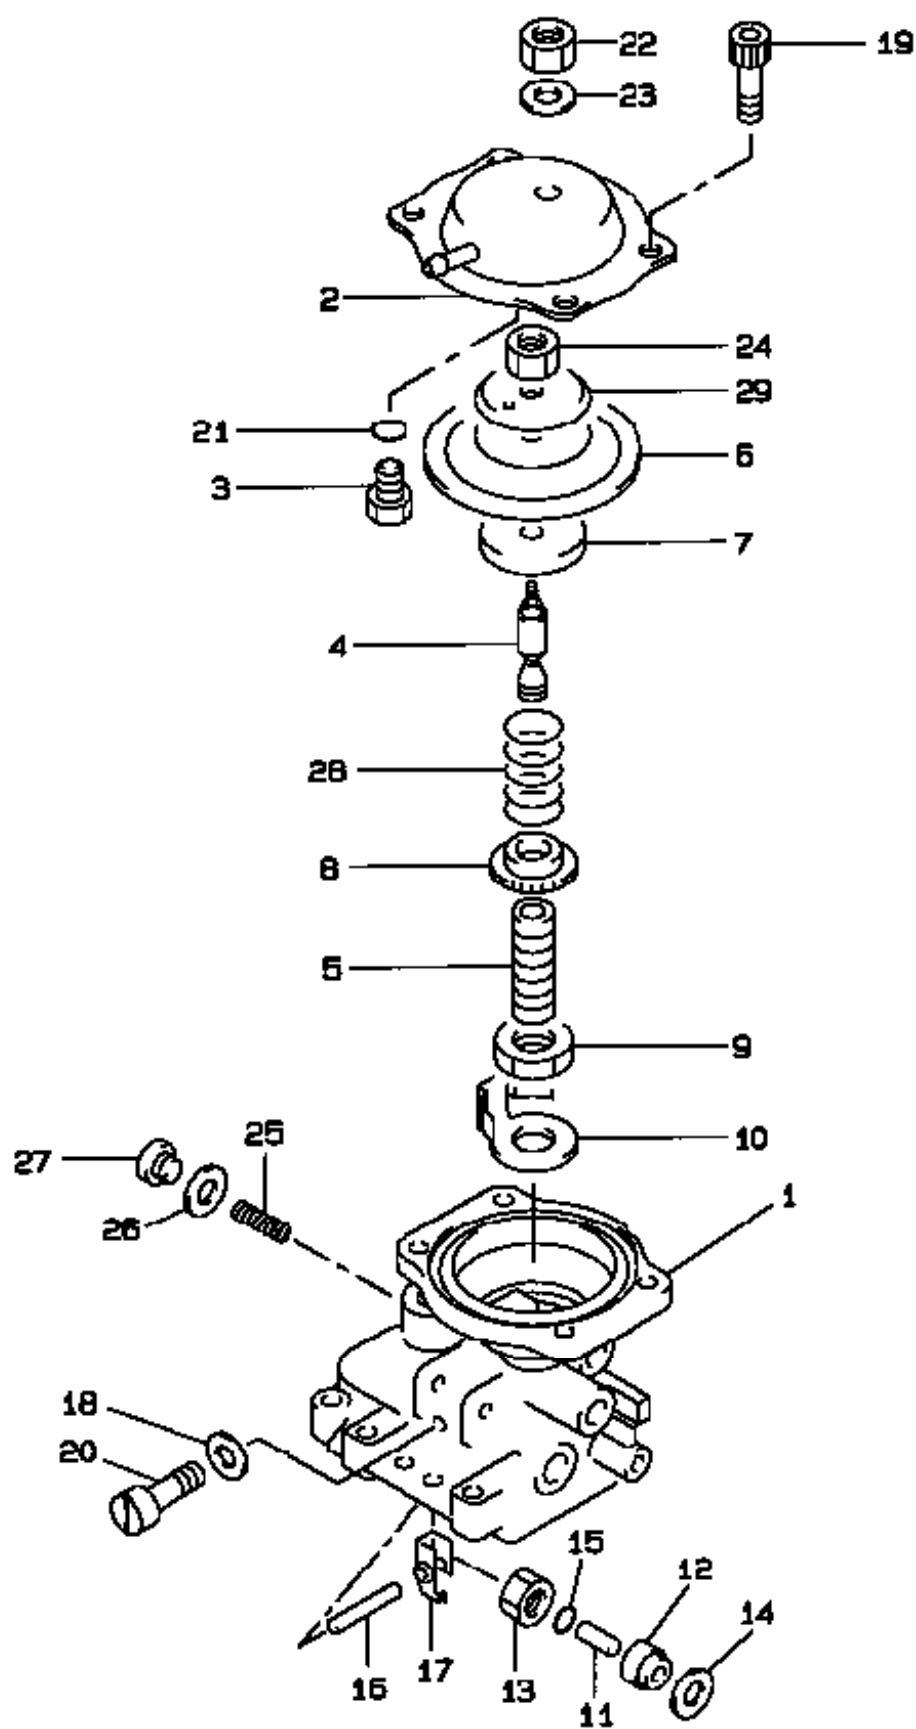

Parts List

Page 1

Compo. P/N: 096490-1611

Assy P/N: 196000-2531

S	M	Illust.No.	Part Name	DENSO P/N	Manu. P/N	QTY	I/C	Start	End	Remarks
		0	COMPENSATOR SUB-AS	096490-1611	22540-5B850	01				
		1	COVER SUB-ASSY, GO	096440-1160	22703-64361	01				
		2	COVER SUB-ASSY, GO	096440-0860	22703-54262	01				
		3	STOPPER, TIMER SLI	096216-0030	22658-64518	01				
		4	R0D, PUSH	096465-0850	22321-67060	1C			9805	
		4	R0D, PUSH	096465-0940	22321-5C130	1C			9805	
		4	R0D, PUSH	096465-0940	22321-5C130	01		9806		
		5	BUSHING, GUIDE	096118-0160	22348-64360	01				
		6	DIAPHRAGM	192631-0010	22542-54260	01			0212	
		6	DIAPHRAGM	192631-0050	22542-6D311	01	B	0301	0602	
		6	DIAPHRAGM	192631-0010	22542-54260	01	B	0602		
		7	SHEET, PLUNGER SPR	096246-0020	22143-54260	01				
		8	BUSHING, GUIDE	096118-0190	22348-54490	01				
		9	NUT, HEXAGON	949050-4070	90099-05156	01				M18
		10	CLIP, TIMER	096211-0070	22656-54490	01				
		11	PIN, LEVER CONECTI	096455-0090	22338-54120	01				
		12	BUSHING, GUIDE	096118-0020	22348-54121	01				
		13	NUT, GOVERNOR SHAF	096254-0021	22722-54120	01				
		14	WASHER, COPPER PLA	949018-1680	90099-01473	01				T1
		15	O-RING	096049-0230	22193-55031	01				ID4
		16	PIN, LEVER SUPPORT	096272-0040	22526-54120	01				
		17	LEVER SUB-ASSY, CO	096295-0670		01				
		18	GASKET, DELIVERY V	096426-0110	22149-6D450	02				
		19	BOLT, SOCKET	096449-0130	22395-54263	04				M6,L14
		20	BOLT, GOVERNOR LIN	096269-0032	22739-54120	02				
		21	O-RING	096049-0180	22193-54561	01				ID10
		22	NUT, HEXAGON	949050-4100	90099-05181	01			0602	M8
		22	NUT, HEXAGON	949050-5430	90099-05252	01	B	0602		M8
		23	WASHER, PLATE	90200-08211	90093-00802	01				T1
		24	NUT, HEXAGON	90176-06361	90092-20608	01				
		25	SPRING	096466-0090	22327-55030	01				
		26	GASKET, DELIVERY V	096426-0120	22149-54800	01				ID12.2
		27	PLUG, SCREW	090317-0240	22129-55110	01				
		28	SPRING, BOOST COMP	096492-0140	22546-64520	1C				L19.3
		28	SPRING, BOOST COMP	096492-0451	22546-17161	1C			9805	L21.6
		28	SPRING, BOOST COMP	096492-0470	22546-17163	1C			9805	L21.7
		28	SPRING, BOOST COMP	096492-0580	22546-67050	1C				L19.3
		28	SPRING, BOOST COMP	096492-0590	22546-67041	1C				L19.4
		28	SPRING, BOOST COMP	096492-0600	22546-67051	1C				L19.3
		28	SPRING, BOOST COMP	096492-0630	22546-17840	1C				L19.0
		28	SPRING, BOOST COMP	096492-0610		1C	D	9806		L19.2
		28	SPRING, BOOST COMP	096492-0640	22546-6D480	1C	D	9806		L19.0
		29	WASHER, THRUST	192633-0010	22549-17140	01				

INJECTION PUMP TEST SPECIFICATIONS

196000-2530

MANUFACTURER	TOYOTA	INJECTION PUMP		196000-253#				
ENGINE TYPE	2L-T			VE4/10F2100RND253				
VEHICLE MODEL	HILUX/ 4 RUNNER	ROTATION	Clockwise viewed from drive side	GOVERNOR TYPE	Maximum-minimum speed			
RATED VOLTAGE	12V	INJECTION ORDER	A - B - C - D	INJECTION INTERVAL	90° ± 30'			
Dimension KF (mm)	6.50 ± 0.10		Dimension MS (mm)	0.30 ± 0.10				
Dimension K (mm)	3.30 ± 0.15		Dimension PS (mm)	0.10 ± 0.02				
1. TEST CONDITIONS								
Nozzle	093400-0540 (DN12SD12A)		Feed Pressure	19.6 kPa (0.2 kgf/cm ²)				
Nozzle Opening Pressure	14.7 ± 0.5 MPa (150 ± 5 kgf/cm ²)		High Pressure Pipe	Ø2 X Ø6 X 840 mm				
Test Oil	SAE J967 (ISO4113)		Fuel Temperature	40 - 45 °C (104 - 113°F)				
NOTE : Apply 6 volts DC across the fuel cut solenoid during adjustment.								
2. PRE-ADJUSTMENT								
Applying 6 ± 0.1 V to T.C.V.								
	Lever Position (deg)	Pump Speed (rpm)	Boost Pressure		Fuel Delivery		Max. Spread in Delivery	
			(kPa)	(mmHg)	(mm ³ /st)	(cc/200st)	(mm ³)	(cc)
Full Load	28.5 ± 5° (Full)	900	116.7	875	70.0 ± 0.5	14.0 ± 0.1	2.0	0.4
High Speed		2400	116.7	875	24.8 ± 4.0	5.0 ± 0.8	—	—
NOTE : Dimension of Governor Shaft, L = about 2.5 mm								
3. ADJUSTMENT OF INTERNAL PRESSURE						Applying 6 ± 0.1 V to T.C.V.		
Lever Position	Pump Speed (rpm)	Boost Pressure		Internal Pressure		Remarks		
		(kPa)	(mmHg)	(kPa)	(kgf/cm ²)			
Full	500	116.7	875	382.5 ± 29.5	3.9 ± 0.3	By the regulating valve		
	2100	116.7	875	715.5 ± 29.5	7.3 ± 0.3			
4. OVERFLOW QUANTITY CHECK						Applying 6 ± 0.1 V to T.C.V.		
Lever Position	Pump Speed (rpm)	Boost Pressure		Overflow Quantity		Remarks		
		(kPa)	(mmHg)	(L/h)	(cc/1000st)			
Full	2200	116.7	875	22 - 48	167 - 364			
NOTE : The overflow valve belonging to the pump should be used checking.								
5. ADJUSTMENT OF TIMER						Applying 6 ± 0.1 V to T.C.V.		
Lever Position	Pump Speed (rpm)	Boost Pressure		Piston Travel (mm)	Remarks			
		(kPa)	(mmHg)					
Full	600	116.7	875	1.27 ± 0.40	Max. piston travel			
	1200	116.7	875	3.20 ± 0.40				
	1750	116.7	875	5.00 ± 0.40				
	2300	116.7	875	6.10 ± 0.24				
NOTE : Hysteresis at each pump speed is less than 0.3 mm.								

Applying 6 ± 0.1 V to T.C.V.

7. ADJUSTMENT OF FUEL DELIVERY Applying 6 ± 0.1 V to T.C.V.

Applying 6 ± 0.1 V to T.C.V.

8. SETTING OF LOAD SENSING TIMER		— : Not Applicable
---	--	--------------------

— : Not Applicable

[illegible]

Start of Load Sensing	—	—	—	—	—	—
-----------------------	---	---	---	---	---	---

End of Pressure Drop	—	—	—	—	—	—
----------------------	---	---	---	---	---	---

Check Points	1. — : — mm
	2. Dimension of Governor Shaft : $L = 1.15 \pm 0.85$ mm

9. SETTING OF ADJUSTING LEVER AT LOW SPEED							Applying 6 ± 0.1 V to T.C.V.
Lever Position (deg)	Pump Speed (rpm)	Boost Pressure (kPa)	Fuel Delivery		Max. Spread in Delivery		Remarks
			(mm³/st)	(cc/500st)	(mm³)	(cc)	
− 16 ± 5° (Idle)	350	0 (0 mmHg)	17.3 ± 1.5 = A	8.7 ± 0.8 = A	1.7	0.9	Lever setting
	425	0 (0 mmHg)	(A − 8.0) ± 2.5	(A − 4.0) ± 1.3	—	—	


10. SETTING OF ADJUSTING LEVER AT PARTIAL RANGE							— : Not Applicable
Pump Speed (rpm)	Boost Pressure		Fuel Delivery		Remarks		
	(kPa)	(mmHg)	(mm³/st)	(cc/500st)			
—	—	—	—	—	—		

11. CHARACTERISTIC OF A.C.S.D.							Applying 6 ± 0.1 V to T.C.V.
Lever Position	Pump Speed (rpm)	Boost Pressure		Measuring Value	Remarks		
		(kPa)	(mmHg)				
Idle	350	0	0	0.82 ± 0.10 mm	Piston Travel		
	350	0	0	0 mm ³/st	Idle-up Quantity (0 cc/500st)		
Fuel temperature : 39 - 41°C							

12. ADJUSTMENT OF T.C.V.						
Lever Position	Pump Speed (rpm)	Boost Pressure		Piston Travel (mm)	Remarks	
		(kPa)	(mmHg)			
Full	1200	0	0	1.56 ± 0.50	With applying 0 (V)	

13. SETTING OF DIAPHRAGM FOR HEATER & POWER STEERING							— : Not Applicable
Pump Speed (rpm)	Vacuum Pressure		Fuel Delivery		Remarks		
	(kPa)	(mmHg)	(mm³/st)	(cc/500st)			
—	—	—	—	—	—		

14. ADJUSTMENT OF POWER CONTROL							— : Not Applicable
Lever Position	Pump Speed (rpm)	Boost Pressure		Fuel Delivery		Remarks	
		(kPa)	(mmHg)	(mm³/st)	(cc/200st)		
—	—	—	—	—	—	—	



RPS Connector